

**Installation Instructions
Hand Wash Basin
Model ROKIA
Order no. 353-1000**

1. General Information

- Read these installation instructions carefully as they contain important information for the installation of the hand wash basin.
- Should you pass the hand wash basin to a third party, these installation instructions should be handed over.
- As soon as you have unpacked the hand wash basin, check, whether everything is in a faultless condition. Should anything be damaged, inform your dealer.
- Dispose the packing material according to the local regulations. All the packaging items (plastic bags, cardboard, polystyrene foam, nails, etc..) should not be left within reach of children, because they are potential sources of danger.
- The manufacturer/dealer cannot be made responsible for damages, which arise through not observing these installation instructions.


2. Installation

- The installation should be only installed by a qualified specialist according to the valid standards.
- Remove all protection and packing materials.
- Check the hand wash basin for any damages. If something is damaged, inform your dealer.

Assembly of the hand wash basin

- a) Install the siphon at the basin discharge.
- b) Put the swan neck/water discharge into the hole, which is located above the right basin edge.
- c) Screw the flexible hose (under the basin edge) on the swan neck.
- d) Fix the basin with the attached support and the screws in horizontal position on the wall.
- e) Screw the hose loosely on the lever valve and the wall mounting plate also.
- f) Look for within the range of the hose a place, where you can reach the lever valve comfortably with the knee.
- g) There you mark the holes on the wall and bore then the holes for the fastening of the lever valve.
- h) Turn the hose off again from the lever valve.
- i) Turn the wall mounting plate off again from the lever plate.
- j) Screw the wall mounting plate on the wall and pay attention, whether it sits firmly.
- k) Turn the valve firmly on the wall mounting plate.
- l) Screw the flexible hose again firmly on the valve and consider the direction of the water flow. On the valve is for this specially an arrow. If you do not consider it, the valve will not close correctly.
- m) If you need the mixing valve for cold/warm water mixture, then turn the mixer on the lever valve.
- n) The connection to the house water pipe and also the discharge should be installed by a plumber. The accessories for these are not included in the delivery.

Fig. 1

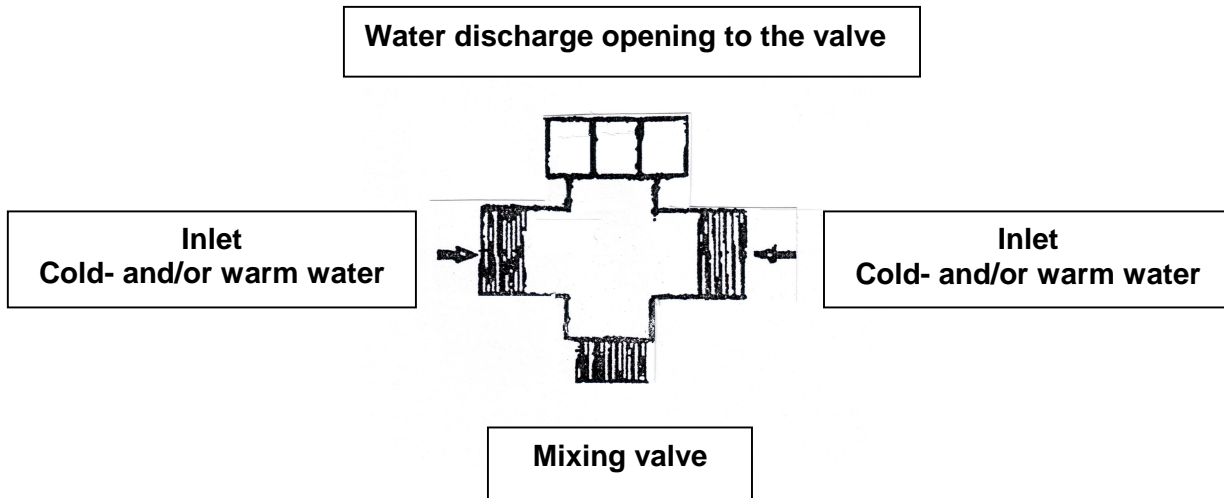

3. Cleaning

- For hygienical reasons the hand wash basin should be cleaned daily.
- Clean everything with a damp cloth and some commercial cleaning detergent. Afterwards dry it carefully.
- You can clean the hand wash basin with a high-grade steel cleaner also.
- Clean regularly the siphon.

4. Technical and other data

- Knee operated
- Material: Stainless steel AISI 304
- Movable mixspout
- With setback flap
- Splashboard
- Connection to the waterpipe – 1/2"
- Siphon inscluded
- Dimensions: W 380 x D 200 x H 330 mm
- Weight: net 2,9 kg - brut 3,9 kg